



GC 1917

Features: High Switching capability


Contact Form: SPDT (Form C)

Size: 5.6 *36mm

Electric Data: 60W/400V/1.0A

MOQ: 200pcs/Box

Origin: India

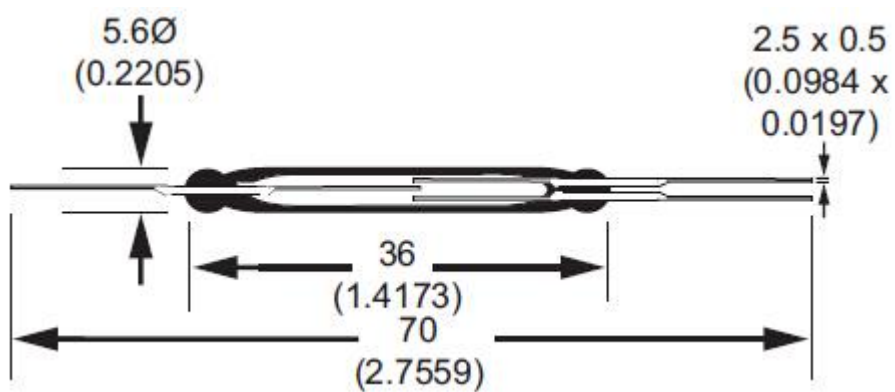

Features	High Switching capability	
Supplier	Comus	
Type	-	GC1917
Contact Form	-	C
Contact Material	-	Ru
Switching Capacity	Max. W/VA	60
Switching Voltage	Max. VC/AC	400
Switching Current	Max. A	1.0
Carry Current	Max. A	2.0
Breakdown Voltage	Min. VDC	750 1000 (PI≥50)
Contact Resistance	Max. mOhms	100
Insulation Resistance	Min. Ohms	10 ⁹
Pull-in Sensitivity	AT	40-100

Drop-in Sensitivity	AT	20 Min.
Operate Time	Max. ms	4.0
Bounce Time	Max. ms	0.5
Release Time	Max. ms	0.15
Resonant Frequency	Typ. Hz	-
Operating Frequency	Max. Hz	100
Vibration(10-1000Hz)	g	35
Shock(11ms)	g	50
Capacitance	Typ. pF	1.0
Operating Temp. Range	Deg. °C	-40~+125
Test Coil	Type	1500