





Liquid Level Controllers

P1LCW1

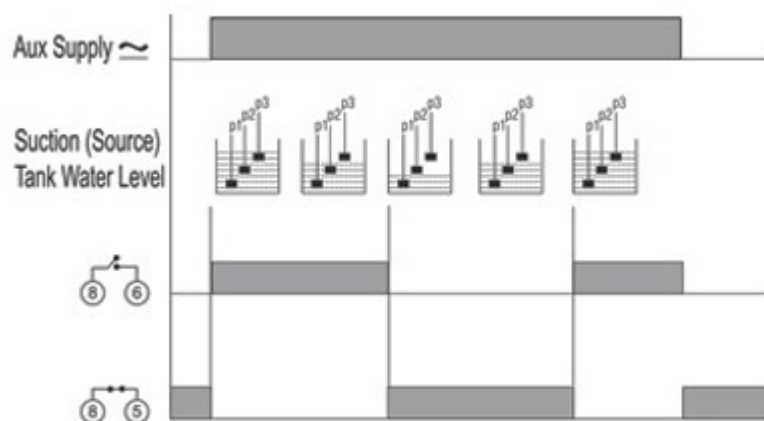

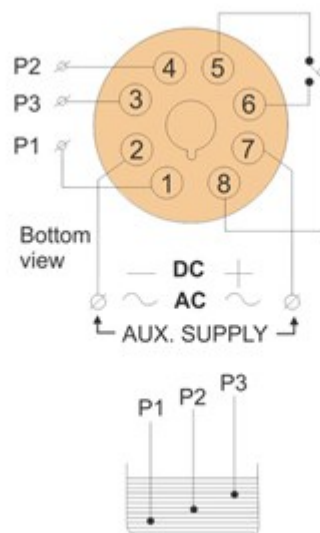

Technical Data

Auxilliary Supply

- **Auxilliary Supply** : 24 / 110 / 240 / 380 / 415 V AC $\pm 10\%$, 50 / 60 Hz, 12 / 24 V DC
-

Output Contacts

- **Output Contacts** : 1 CO
-

Input Sensors

- **Input Sensors** : 3 Electrodes
-

Sensitivity

- **Sensitivity** : N.A.
-

Trip Time Delay

- **Trip Time Delay** : Less than 1 sec
-

Weight

- **Unit** : 125 gms.
 - **Sensor (each)** : 50 gms.
-

Dimensions (mm)Unit

- **Overall (L x W x D)** : 50 x 40 x 80
 - **Mounting (L x W)** : 8 - pin plug-in
-

Sensor (mm)

- **Overall** : 24 (Dia) x 76 (L)
-

Note:

- Wherever not specified Contact Rating : 5A @ 230 V AC (resistive)
-