



## ■ Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty




## SPECIFICATION

| MODEL                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | NES-25-5                                                                                                                | NES-25-12    | NES-25-15      | NES-25-24    | NES-25-48    |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------|----------------|--------------|--------------|
| OUTPUT                   | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 5V                                                                                                                      | 12V          | 15V            | 24V          | 48V          |
|                          | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 5A                                                                                                                      | 2.1A         | 1.7A           | 1.1A         | 0.57A        |
|                          | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0 ~ 5A                                                                                                                  | 0 ~ 2.1A     | 0 ~ 1.7A       | 0 ~ 1.1A     | 0 ~ 0.57A    |
|                          | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 25W                                                                                                                     | 25.2W        | 25.5W          | 26.4W        | 27.36W       |
|                          | RIPPLE & NOISE (max.) Note.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 80mVp-p                                                                                                                 | 120mVp-p     | 150mVp-p       | 200mVp-p     | 240mVp-p     |
|                          | VOLTAGE ADJ. RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 4.75 ~ 5.5V                                                                                                             | 10.8 ~ 13.2V | 13.5 ~ 16.5V   | 21.6 ~ 26.4V | 43.2 ~ 52.8V |
|                          | VOLTAGE TOLERANCE Note.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ±2.0%                                                                                                                   | ±1.0%        | ±1.0%          | ±1.0%        | ±1.0%        |
|                          | LINE REGULATION Note.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | ±0.5%                                                                                                                   | ±0.5%        | ±0.5%          | ±0.5%        | ±0.5%        |
|                          | LOAD REGULATION Note.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | ±0.5%                                                                                                                   | ±0.5%        | ±0.5%          | ±0.5%        | ±0.5%        |
|                          | SETUP, RISE TIME                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 500ms, 30ms/230VAC      1200ms, 30ms/115VAC at full load                                                                |              |                |              |              |
|                          | HOLD UP TIME (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 50ms/230VAC      10ms/115VAC at full load                                                                               |              |                |              |              |
| INPUT                    | VOLTAGE RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 85 ~ 264VAC      120 ~ 370VDC                                                                                           |              |                |              |              |
|                          | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 47 ~ 63Hz                                                                                                               |              |                |              |              |
|                          | EFFICIENCY (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 78%                                                                                                                     | 83%          | 84%            | 86%          | 86%          |
|                          | AC CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 0.55A/115VAC      0.35A/230VAC                                                                                          |              |                |              |              |
|                          | INRUSH CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | COLD START 45A                                                                                                          |              |                |              |              |
|                          | LEAKAGE CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <2mA / 240VAC                                                                                                           |              |                |              |              |
| PROTECTION               | OVERLOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 110 ~ 150% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed |              |                |              |              |
|                          | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 5.75 ~ 6.75V                                                                                                            | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 27.6 ~ 32.4V | 55.2 ~ 64.8V |
| ENVIRONMENT              | WORKING TEMP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | -20 ~ +60°C (Refer to "Derating Curve")                                                                                 |              |                |              |              |
|                          | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 20 ~ 90% RH non-condensing                                                                                              |              |                |              |              |
|                          | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | -40 ~ +85°C, 10 ~ 95% RH                                                                                                |              |                |              |              |
|                          | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ±0.03%/°C (0 ~ 45°C)                                                                                                    |              |                |              |              |
|                          | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes                                                 |              |                |              |              |
| SAFETY & EMC<br>(Note 7) | SAFETY STANDARDS Note.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | UL60950-1, CB(IEC60950-1),CCC GB4943.1:2011 approved                                                                    |              |                |              |              |
|                          | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | I/P-O/P:3KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC                                                                         |              |                |              |              |
|                          | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH                                                               |              |                |              |              |
|                          | EMC EMISSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Compliance to EN55022 (CISPR22) Class B, EN61000-3-2,-3                                                                 |              |                |              |              |
|                          | EMC IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, EN61000-6-1, light industry level, criteria A                    |              |                |              |              |
| OTHERS                   | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 411.47Khrs min.      MIL-HDBK-217F (25°C)                                                                               |              |                |              |              |
|                          | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 99*82*35mm (L*W*H)                                                                                                      |              |                |              |              |
|                          | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0.3Kg; 45pcs/14.5Kg/0.66CUFT                                                                                            |              |                |              |              |
| NOTE                     | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. Line regulation is measured from low line to high line at rated load.<br>5. Load regulation is measured from 0% to 100% rated load.<br>6. For the request of GB4943.1,the power supply is only suitable for use in the altitude 2000m below and the non tropical climate condition.<br>7. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."<br>(as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> ) |                                                                                                                         |              |                |              |              |

## Mechanical Specification

Case No. 932B Unit:mm

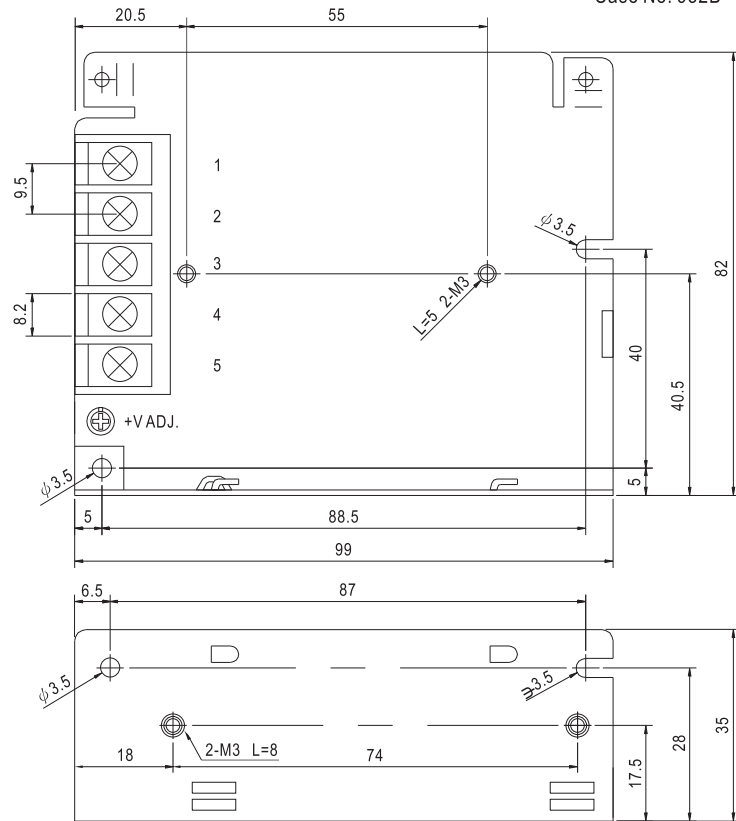


Terminal Pin No. Assignment


| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4       | DC OUTPUT -V |
| 2       | AC/N       | 5       | DC OUTPUT +V |
| 3       | FG         |         |              |

## Block Diagram

fosc : 60KHz

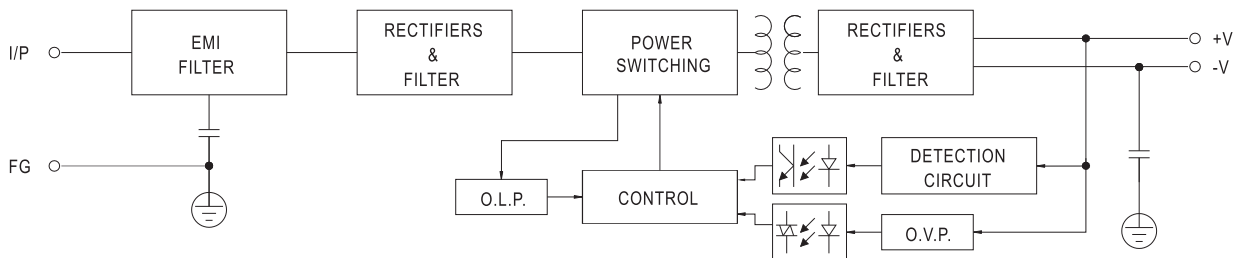

## Derating Curve

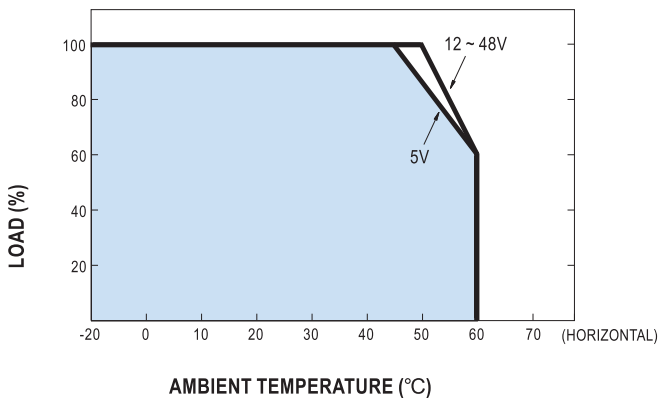

## Output Derating VS Input Voltage

